


MoveRoll® Kicker

A compact device with great power

MoveRoll® pneumatic Kicker

MoveRoll® pneumatic Kicker is developed to push the roll horizontally and roll it to the next conveying device. MoveRoll® Kicker can be easily installed as new application or to replace the existing traditional kickers. The unique design with sliding rails makes it possible to have a compact size kicker with a power which can kick rolls up to 4.5 tons. Depending on the application MoveRoll kicker can reduce energy consumption up to 75% compared to the traditional applications

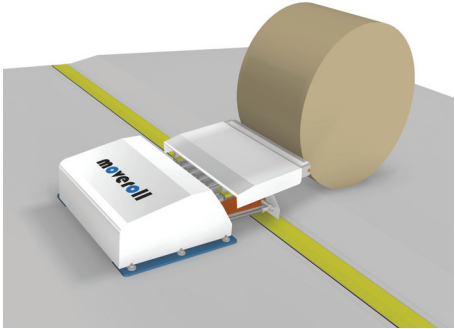

Energy requirements

Control voltage - 24 VDC
Air supply - 4 Bar -

Roll key data

Min dia: 600 mm
Max dia 1600 mm
Max weight 4500 kg

Kicker key data

Width 1560 mm
Height 570 mm
Nom. Length 910 mm
Total Length 1100 mm
Weight: 650 kg

Foundation

Plain floor or metal grid

The kicker can be adjusted according to the applications

Receiving / Kicking method



Telescopic Slide Rails kick/ receive the roll automatically (* patented method)

Applications

Paper/Tissue roll kicking
Paper/ Tissue roll receiving

Adjustable for different rolling applications

Kicker positions

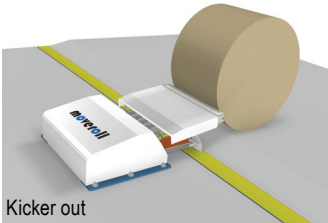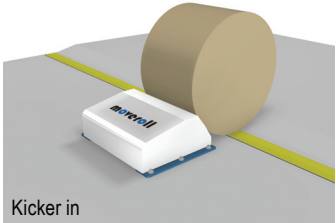

Dimensions and key data

Width (mm)	Height (mm)	Nominal Length (mm)	Total Length (mm)	Weight (kg)	Air Supply (minimum)	Power (max roll)	Electrical connection
1560	556	910	1100	650	4 bar	4.5 ton	24 VDC

